



**G.JAMES**  
Windows & Doors

## Hinged Door 472 Series



100mm  
Frame



125mm  
Screen  
Compatible  
Frame



Designed with style and security in mind, the G. James 472 Series Hinged Door offers an attractive choice for main entry, balcony and exterior laundry room doors.

The 472 Series hinged door is the perfect low maintenance alternative to timber entry doors or sliding doors where opening width is limited. Configurations include an expansive set of double doors or the economy of a single door - both can be combined with fixed side lights or overhead high lights to complete your entrance.

This door combines quality hardware with the uncompromising strength of heavy duty aluminium profiles to ensure you enjoy consistent long-term performance for years to come.

*Left images: Cut-through sill detail illustrating 100mm and 125mm framing options (guide only).*



## Features

- Choice of 100mm or 125mm frame (125mm frame accepts all types of screen doors without the need for an add-on build-out)
  - Full perimeter weather seals provide an excellent barrier to wind and rain
  - The door leaf features a chamfered exterior profile for added style (also reduces the build-up of dust compared to a flat profile)
  - Dedicated glazing bars available to complement colonial or Hampton style designs<sup>1</sup>
  - An optional, multi-point lever compression lock offers superior security and ensures optimum compression of the door against the weather seals<sup>1</sup>
  - Matching side lights and high lights
  - Aluminium frame-only configurations available to accommodate timber doors
  - 7 year 'peace of mind' guarantee  
(Terms and conditions apply)
- <sup>1</sup> Available upon request, additional cost applies



## Example Configurations

Single Door with Screen



Double Doors with Screens



Double Doors





# G.JAMES

Windows & Doors

## Hinged Door 472 Series

### Hardware Options



Powder Coat Black



Satin Chrome



Powder Coat White

### Screens

#### Flyscreens

G. James flyscreens are a practical and economical method to cover the open area of your windows and doors, helping to keep your home free from flies. Our flyscreens are constructed using an extruded aluminium frame and standard fibreglass mesh.



#### Barrier Screens

Barrier screens offer an affordable, intermediate level of security for your home. G. James' barrier screens feature black Armagril (diamond-shaped, aluminium grille), fibreglass mesh and aluminium frame.



#### Crimsafe Screens

Crimsafe screens provide a superior level of safety and security to your windows and doors. The integral high-tensile, stainless steel mesh is discrete in appearance ensuring your views are unhindered.





Colour Selector

**LEGEND:** (C) COLOURBOND® Steel Colour Match  
(G) Gloss (M) Matt (S) Satin

Powdercoat Colours



Black (S)




Monument (M)(C)




Woodland Grey (S)(C)




Ironstone (S)(C)



White Birch (G)



Architectural White (S)



Primrose (G)



Paperbark (S)(C)




Pearl White (G)



Dune (S)(C)



Shale Grey (S)(C)



Surfmist (M)(C)



Ultra Silver (G)



Silver Pearl Kinetic® (S)  
(Price on application)

Anodised Finishes



Clear



Residential Bronze

Note: All Anodised Finishes are price on application. All residential anodised finishes are supplied at AA15 (film thickness) with AA20 & AA25 available upon request. Polished Silver (internal products only) and other Bronze finishes are available – contact your G. James representative for further information.



## Technical Data

<b>Max. Frame Sizes<sup>1</sup></b>	<ul style="list-style-type: none"><li>• Single Door: 2400mm (h) x 950mm (w)</li><li>• Double Door: 2400mm (h) x 1810mm (w)</li></ul>
<b>Other Limitations</b>	This product is not suitable for sheer wall or exposed positions
<b>Max. Glass Thickness</b>	<ul style="list-style-type: none"><li>• Single glazed – 6.76mm</li><li>• Double glazed (IGU) – 20mm</li></ul>
<b>Max. Water Performance</b>	<ul style="list-style-type: none"><li>• Standard sill - 150 Pa.</li><li>• Sub-sill configuration - 450 Pa.</li></ul>
<b>Perimeter Frame Width Options</b>	<ul style="list-style-type: none"><li>• 100mm – no screening compatibility</li><li>• 125mm – screen compatible</li></ul>
<b>WERS Data<sup>2</sup></b>	U-Value range: 3.40 – 6.20 SHGC range: 0.26 - 0.63
<b>Acoustics<sup>2</sup></b>	Up to Rw 31
<b>Bushfire Attack Level</b>	Tested and certified up to BAL-40
<b>Compatible Construction Types:</b>	Brick veneer, clad wall, block wall, cavity brick and modular/transportable

<sup>1</sup> Maximum sizes are a guide only and subject to the wind rating or SLS/ULS requirements of the site.

<sup>2</sup> Consult your G.James representative to determine the most suitable product configuration for your requirements.

## IMPORTANT


### **Don't let the opportunity pass to consider your glass options.**

When specifying the windows and doors for your home, you'll make decisions in relation to ventilation, light, aesthetics and operation – all very relevant considerations. There is however another equally important consideration that is often overlooked, and that is the type of GLASS you choose. The selection of a 'performance' glass can address such issues as heat gain, energy efficiency, security, noise and glare reduction - all of which are central to your comfort and the overall liveability of your home.






Size Range / Configurations

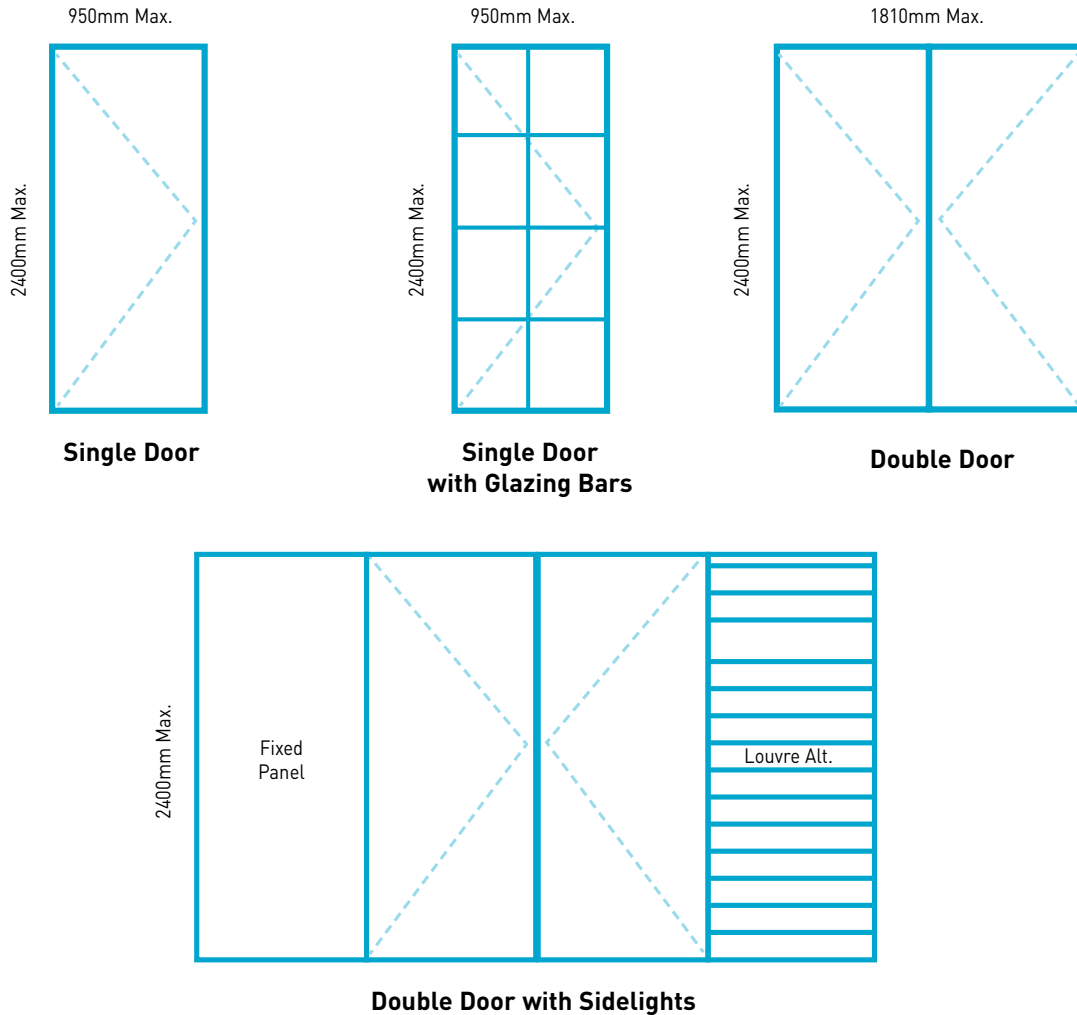

**FRAME OPTIONS**

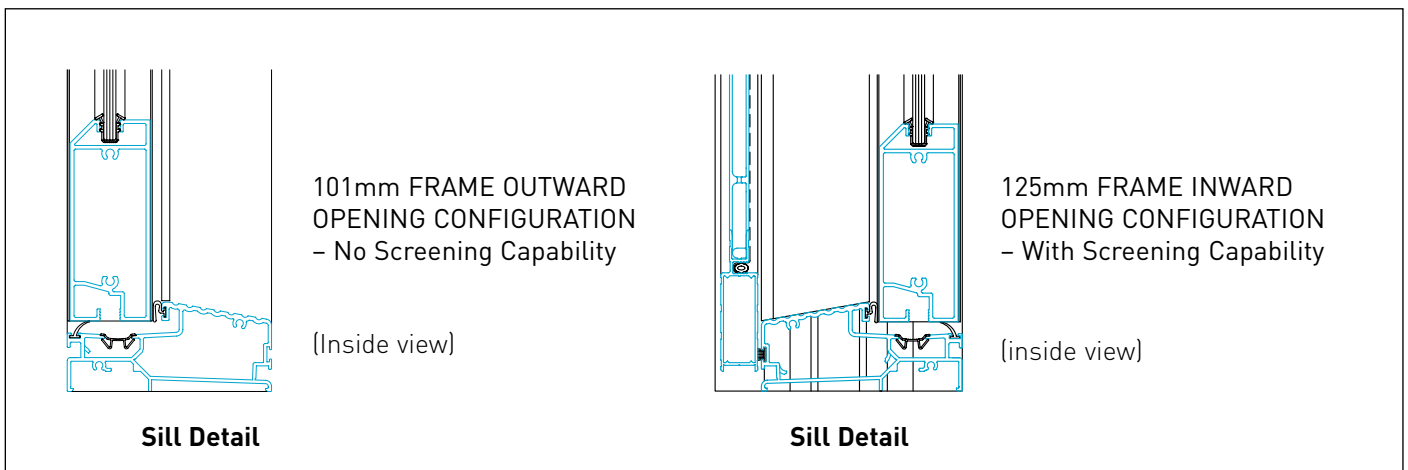

**Product Specific Notes:**

- Lock Options available:
  - > Single Doors: Standard & Premium
  - > Double Doors: Standard, Intermediate, Premium & High Wind.